

(Forces and Newton's Laws):

Newton's Laws:

Isaac Newton discovered three laws of motion for forces:

1. If the net force on an object is zero, then an object at rest will stay at rest, and an object moving at a constant velocity will continue to move at a constant velocity.
2. $\sum F = ma$; i.e., the sum of the forces F acting on an object is directly proportional to the acceleration a of the object. Force is a vector quantity and forces are added vectorially.
3. When an object exerts a force F_{12} on a second object and the net force is zero, the force F_{21} the second body exerts on the first object is equal in magnitude to F_{12} but opposite in sign and direction. $F_{21} = -F_{12}$.

Common Force Systems to Consider when Solving Problems:

1. **Normal & Gravitational Forces:**

One force to consider when solving problems is the **normal force** F_N . When an object lies on a surface, the normal force F_N is the force that is perpendicular to that surface. An illustration is shown below:

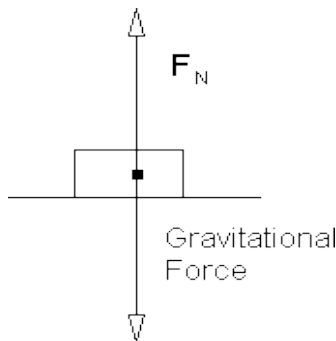


Figure 1: The normal force is shown above. It opposes the gravitational force.

Take a look at figure 1. The gravitational force opposes the normal force F_N and points downward. By Newton's Second law, the gravitational force = ma where m = the mass of the object and a = the acceleration of gravity. The acceleration of gravity = 9.8 m/s^2 . The symbol that is used for the gravitational acceleration is g . The object is not moving; hence, by Newton's First Law, the net force of the above system is zero. By Newton's Third Law, $F_N - mg = 0 \Rightarrow F_N = mg$. The negative sign for the gravitational force is used here because it is pointing downward.

2. Tension in a Pulley:

The next force to consider is tension T . For a pulley, the tension force points toward the pulley as shown below:

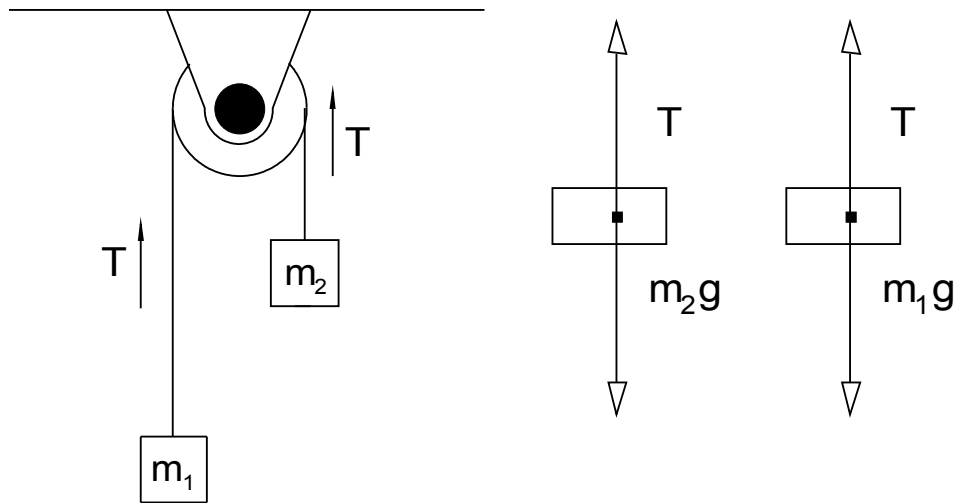


Figure 2: Here is the diagram that illustrates the tension force T and the free body diagram for each of the forces on the two masses above.

For pulleys, the masses have a common magnitude of acceleration a . From intuition, it appears that mass m_2 is going up with acceleration a , and mass m_1 is going down with acceleration $-a$. Hence, you have two equations: $T - m_1g = -m_1a$ and $T - m_2g = m_2a$ by Newton's Second Law. There are only vertical components of acceleration and force.

We can have horizontal pulley systems as shown below (no friction here):

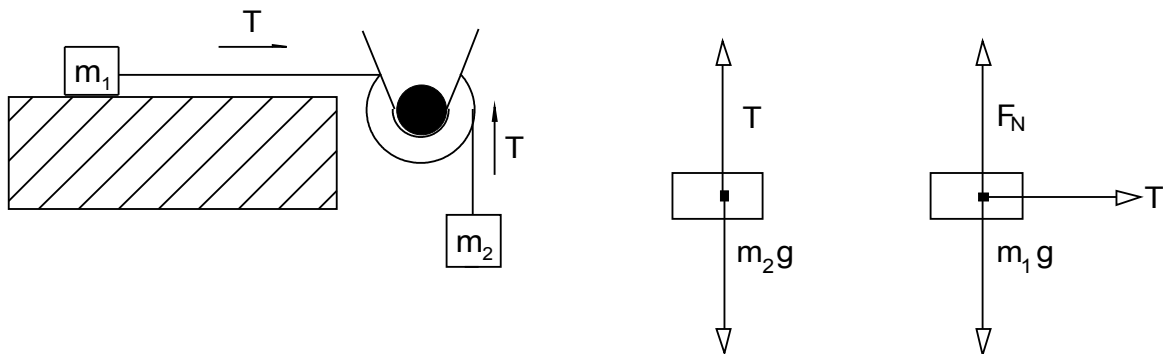


Figure 3: Here is a horizontal pulley system together with its free body diagram.

Adding the vertical components of force, we have $T - m_2g = -m_2a$ and $F_N - m_1g = 0$. Adding the horizontal components of force, we have $Tm_1 = am_1$

There are many variants of pulley systems. The pulley systems above are not the only ones. Many pulley systems need to be handled on a case-by case basis. However, Newton's laws need to be applied and a free body diagram needs to be drawn. To further illustrate the pulley and tension concept, we illustrate the 2-pulley system below:

Equations for a 2-Pulley System:

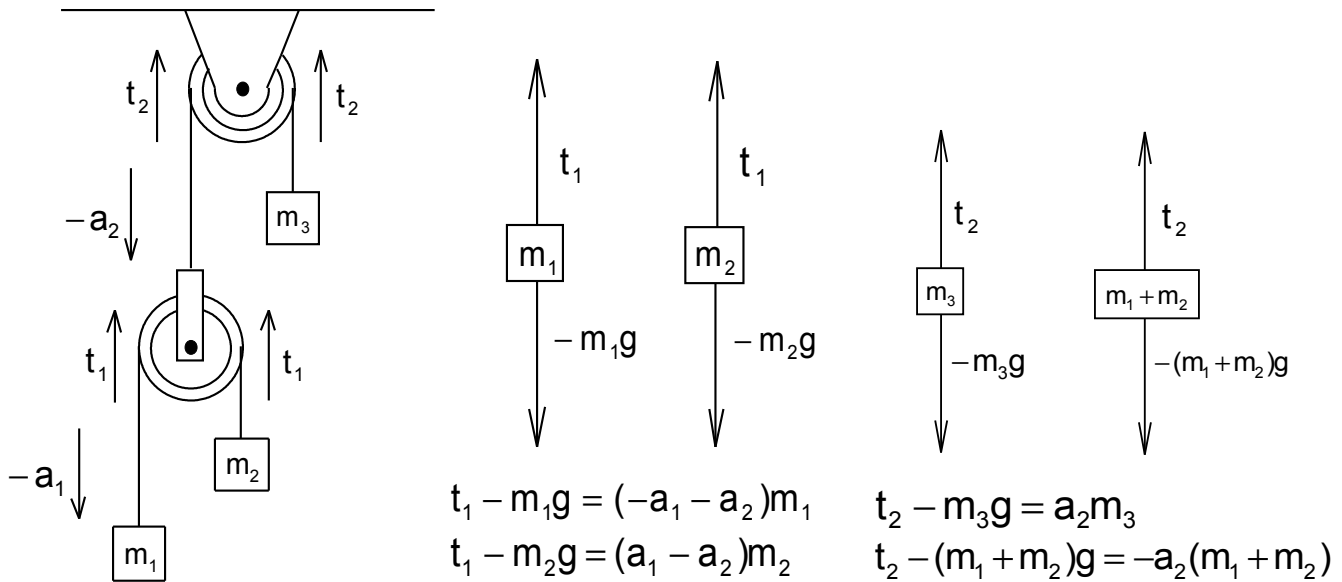


Figure 4: This is the two-pulley system that we are analyzing. The derived equations are shown above.

The total acceleration for m_1 is $-(a_1 + a_2)$ and the total acceleration for m_2 is $(a_1 - a_2)$. We are assuming that the pulleys are massless or the mass of the pulleys are included in the masses above. t_1 and t_2 are the tensions in the lower pulley and the upper pulley, respectively. *WLOG (without loss of generality)*, $m_1 \leq m_2$, and $m_1 + m_2 \geq m_3$. The above system can be generalized for three or more pulleys.

3. Forces on an Incline:

The below system shows how to apply Newton's laws to a mass on an incline:

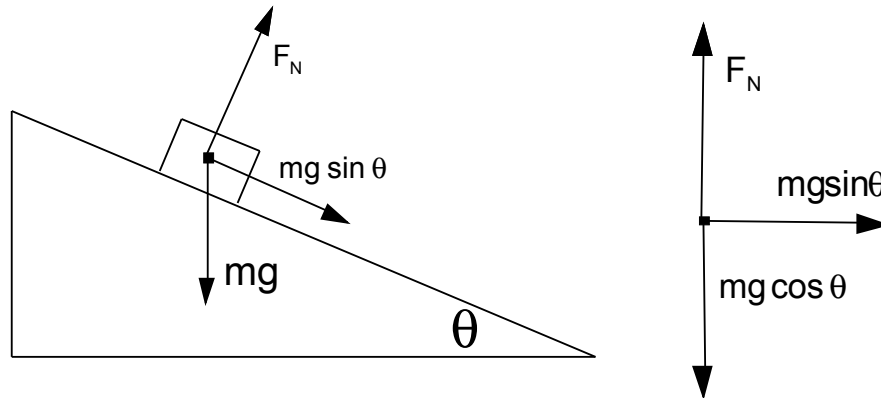


Figure 5: The free body diagram for an object of mass m on an incline is shown above.

When dealing with forces on an incline, let the normal force F_N be on the y -axis. $mg \cdot \sin \theta$ will automatically be on the x -axis. Sum the forces accordingly. From geometry, $F_N = mg \cdot \cos \theta$.